

CITY FACILITIES ARCHITECTURAL SERVICES DIVISION

DATE: March 23, 2007

## ADDENDUM NO. 1

## FOR THE CONSTRUCTION OF THE JOHN J. MONTGOMERY MONUMENT AT YERBA BUENA

Notice is hereby given that the following revisions, additions, and/or deletions are hereby made a part of and incorporated into the plans and specifications for the John J. Montgomery Monument at Yerba Buena Project:

## **PLANS**

- 1. A) **SHEET 6, SECTION B-B:** 4' P.C.C. band around the monument **SHALL BE** 8" thick. Sub slab under monument **SHALL BE** 4" thick. All other P.C.C. walkways shall be per sheet 9, detail 2, 3 ½" thick.
  - B) SHEET 6, SECTION B-B: See attached detail for monument sub slab.
- 2. **SHEET 10, DETAIL 2**: **ADD** note that trash receptacle shall be on a P.C.C. Pad. The pad dimensions shall be 4'x4'x 3 ½" thick.
- 3. A) CHANGE SHEET 10, DETAIL 4 TO READ Detail 5, "Plaque Plinth."
  - B) Accordingly on sheet 4, **CHANGE** callout for the "P.C.C. Plaque Plinth" **TO READ** Detail 5, Plaque Plinth."
- 4. **SHEET 10, DETAIL 1: ADD NOTE 5: "**P.C.C. sign wall shall have a medium sandblast finish."
- 5. A) SHEET 10, DETAIL 4 "P.C.C. Curb Wall": ADD note that all P.C.C. curb walls shall have a minimum embedment depth of 18."
  - B) For clarification, the curb wall shall vary in height and taper to match the adjacent finished grade.
- 6. SHEET S1.1, DETAIL 4: Detail reads: "PL ¼" end plate and studded sleeve supplied by artist, installed by Contractor as shown." CHANGE note to read: "All embedded steel items shall be supplied by artist, shall be galvanized, and shall be installed by Contractor. All rebar shall be supplied and installed by the Contractor."

Page 1 of 3

All Plan Holders for the John J. Montgomery Monument Project at Yerba Buena Subject: ADDENDUM NO. 1
March 23, 2007
Page 2

## **INSTRUCTIONS**

The bidder must sign this addendum in the space provided below and return one signed copy with the bid. Failure to return the signed copy with bid documents shall not relieve the bidder of the obligation to include this addendum to the bid proposal.


Or

Bidder's failure to sign and submit any or all addenda with the bid shall be cause for rejection of the bid.

KATHERINE JENSEI Division Manager

City Facilities Architectural Services Division Public Works Department

Bidder's Name	
Signature and Title of Bidder	Date
KJ:skp File Name	

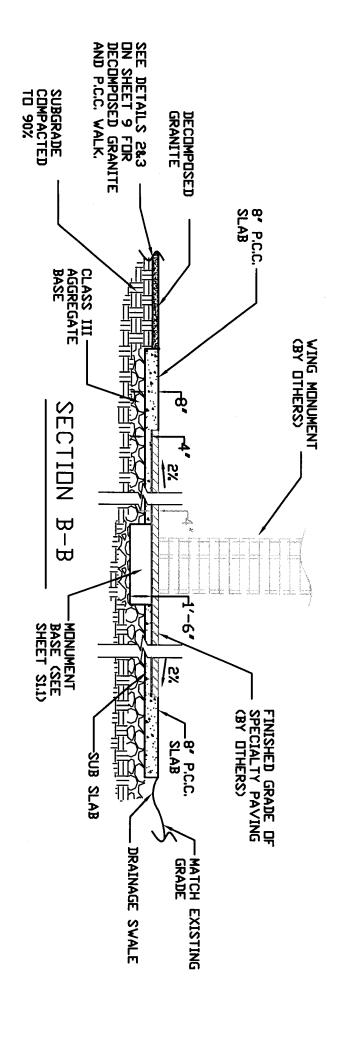

JOHN J. MONTGOMERY MONUMENT MONUMENT SUB SLAB DETAIL DRAWING NOT TO SCALE 3.23.07